
INSTALLATION INSTRUCTIONS 1. ENSURE THE APERTURE IS CLEAN AND FREE OF

- DEBRIS AND LOOSE CEMENT. REMOVE ALL DUST FROM SURFACES REQUIRING INSTALLATION.
- 2. SELECT RYANFIRE SL 40 COLLAR.
- 3. APPLY RYANFIRE MASTIC BETWEEN THE SERVICE PENETRATION AND THE CONCRETE FLOOR TO CREATE A SMOKE SEAL.
- 4. SECURE SL COLLAR AROUND PIPE PENETRATION AND SECURE IT IN PLACE.
- SLIDE THE SL COLLAR ALONG THE PIPE UNTIL IT IS HARD UP AGAINST THE UNDERSIDE OF THE CONCRETE FLOOR.
- FIX THE SL COLLAR TO THE CONCRETE FLOOR USING 32MM MASONRY SCREWS THROUGH ALL FIXING TABS.

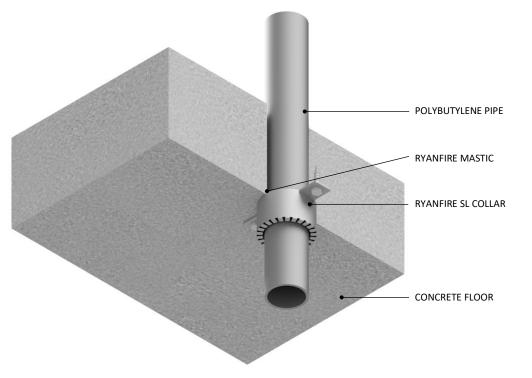

Please note: Ryanfire Products Ltd owns and has copyright in these drawings. They are to be used only for the purpose for which they were intended and supplied and are not to be sold, transferred or made available for use by a third party.

Any misuse of these drawings will result in legal proceedings.

All errors and omissions excepted - the Information contained within this drawing is believed to be correct on the date of publication, and is based upon tested and certified solutions. The policy of RyanFire Products Ltd is one of constant improvement. Installers must therefore ensure that they are following the latest published drawings, test evidence and instructions. Whilst RyanFire Products Ltd will endeavour to keep its publications up to date, the accuracy of the Information contained within this drawing may be affected by pertinent changes in the law or regulatory requirements and alterations or amendments to the specification of the manufactured products. Terms and conditions of sale apply.

RYANFIRE Technical Support: info@ryanfire.co.nz - Tel 09 443 0362

Note

Products: RYANFIRE SL COLLAR,
RYANFIRE MASTIC

Approvals: AS 1530.4/AS 4072.1

BK: 72

Ref: FRT 190285.1

D: 1

Scenario: Penetration seal to polybutylene

pipes.

Construction: 100mm concrete floor.

Aperture size: Ø32mm.

Fire Integrity: 120 minutes. Insulation: 0 minutes.

Services: Up to Ø28mm Polybutylene pipe.

Web based drawings are for example only. Fire performance of any system is dependant on, but not limited to, size of opening, substrate, if penetrations are passing through, type, size and number. Please refer to Ryanfire technical department for detailed and specific fire performance information.



Client

Job Title

Drawing Title

Ryanfire SL Collar to Polybutylene pipe, Concrete floor

	Scale	Date
	NTS	July 2020
	Sheet Size	Drawn By
	A3	
	Drawing Number	Day

Drawing Number

V25.14

1.0